


7 LAYER PROTECTIVE GLASS






6 m

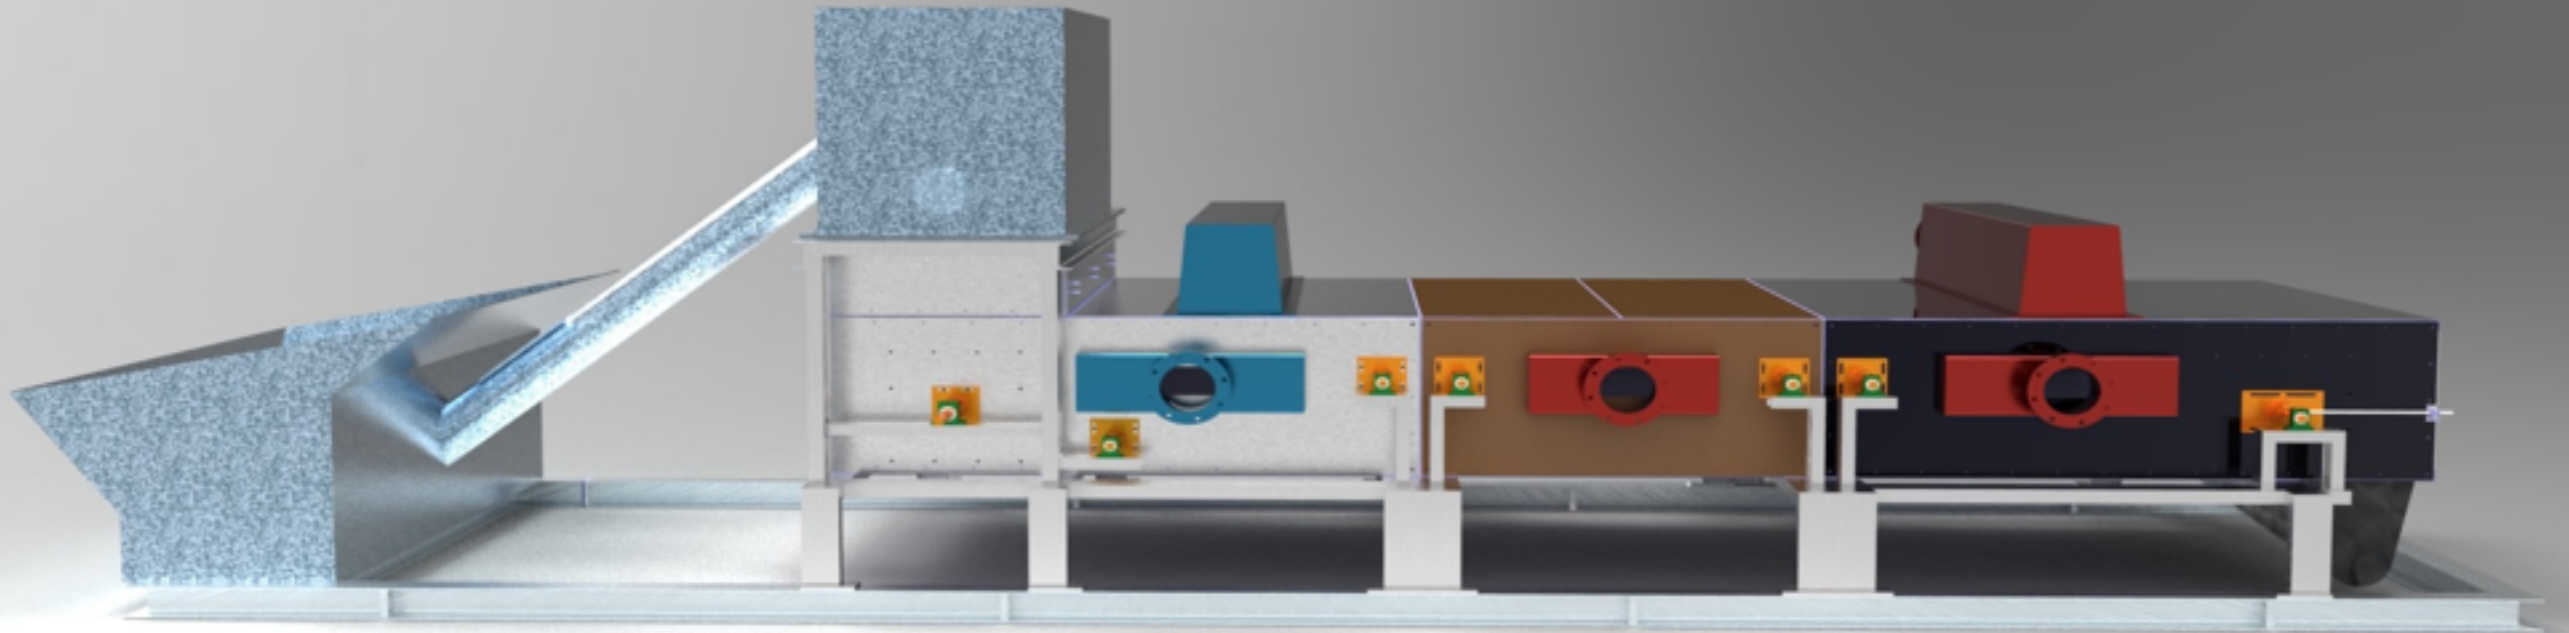

x

1.5 m

Horizontal Bed Kiln

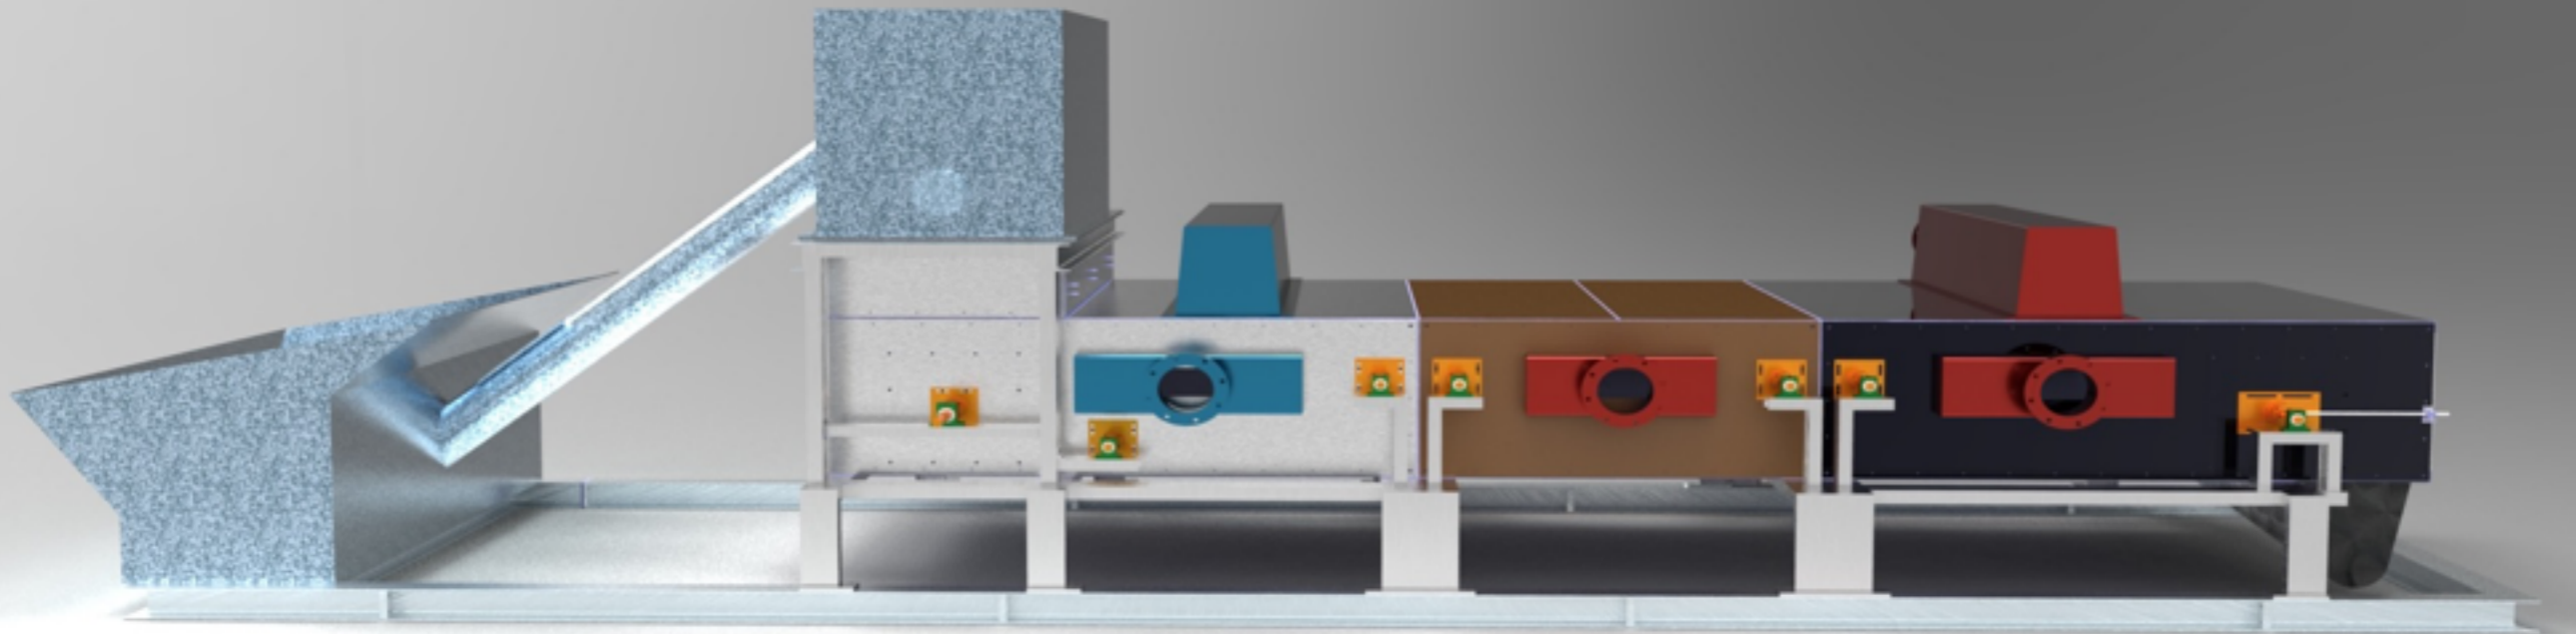

High throughput of 500 kg/hr.
Heat is transferred
very efficiently by hot gases blown
through feedstock bed





Pacific Pyrolysis pilot plant
Capacity 300 kg/hr biomass

Versatility

ability to adapt or be adapted to many different functions or activities

- Can process a very wide variety of feedstocks
- The operator can control:
 - The temperature of each stage
 - Rate of travel through the kiln
 - Thickness of the biomass on the bed
 - The rate of heating or *delta t*, by adjusting the flow rate of the hot gas being injected

